10920 95TT260

Figure 1

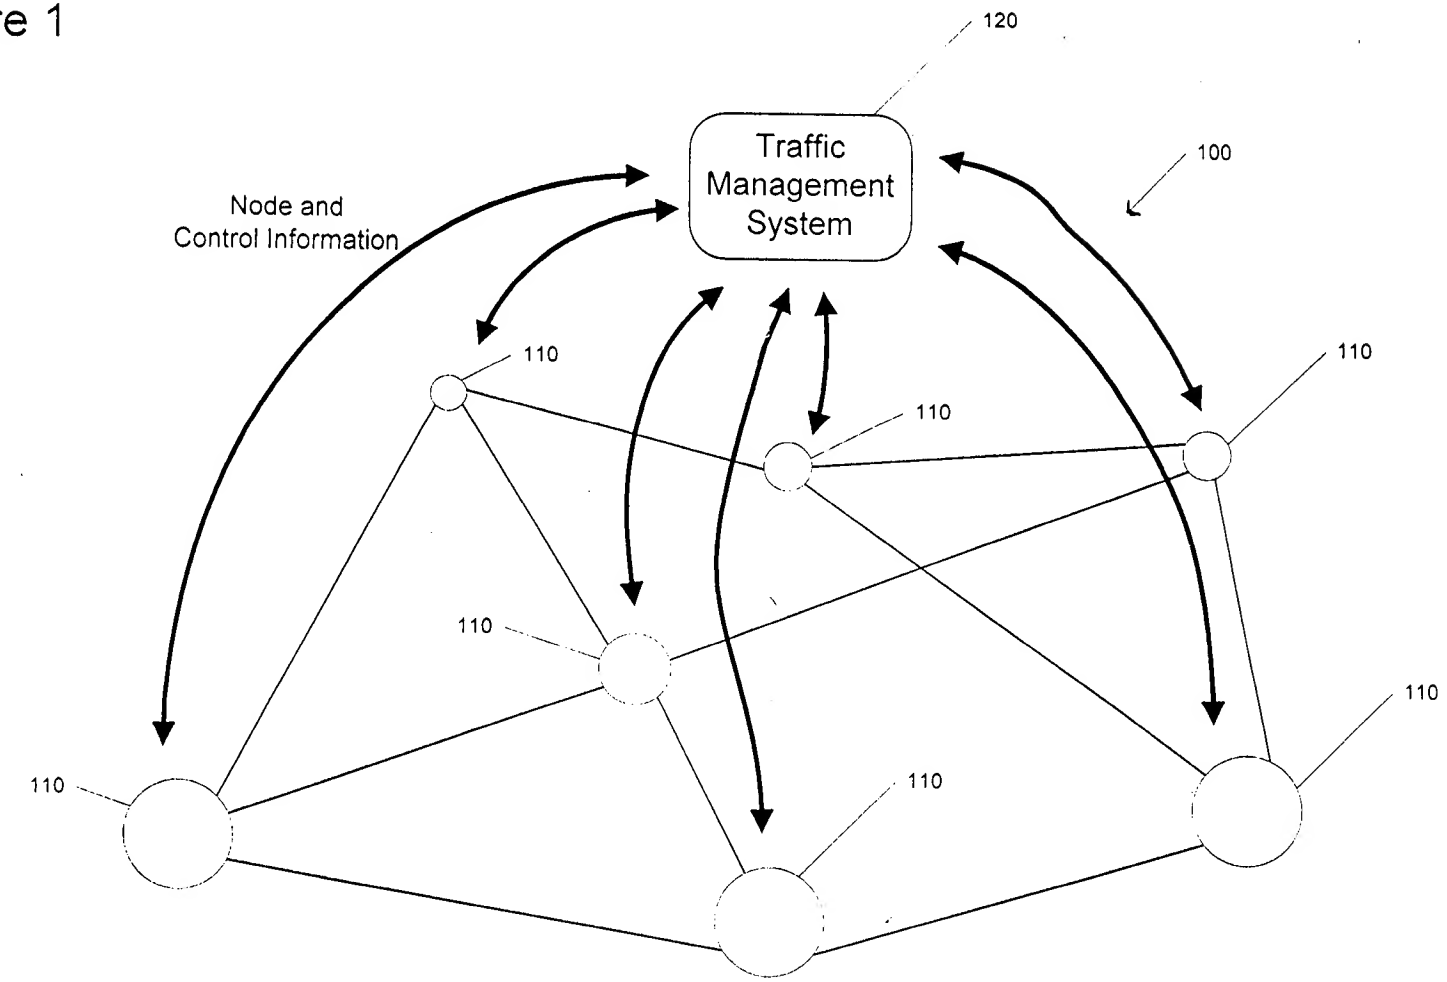

T092TO' 95TT2260

Figure 2

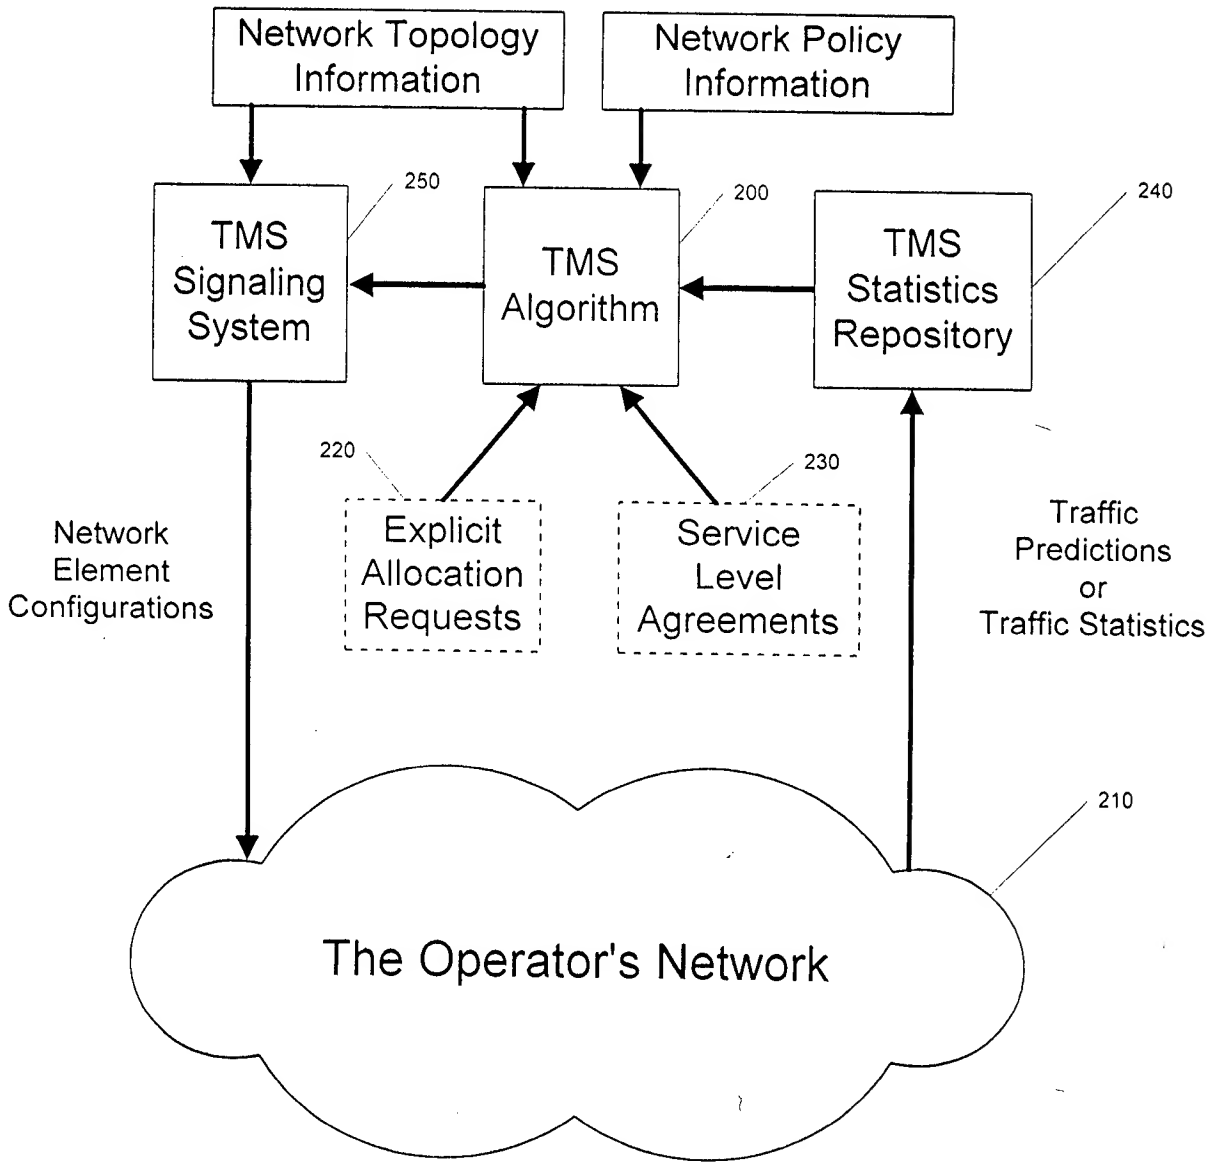

T0920T0 95TT260

Figure 3

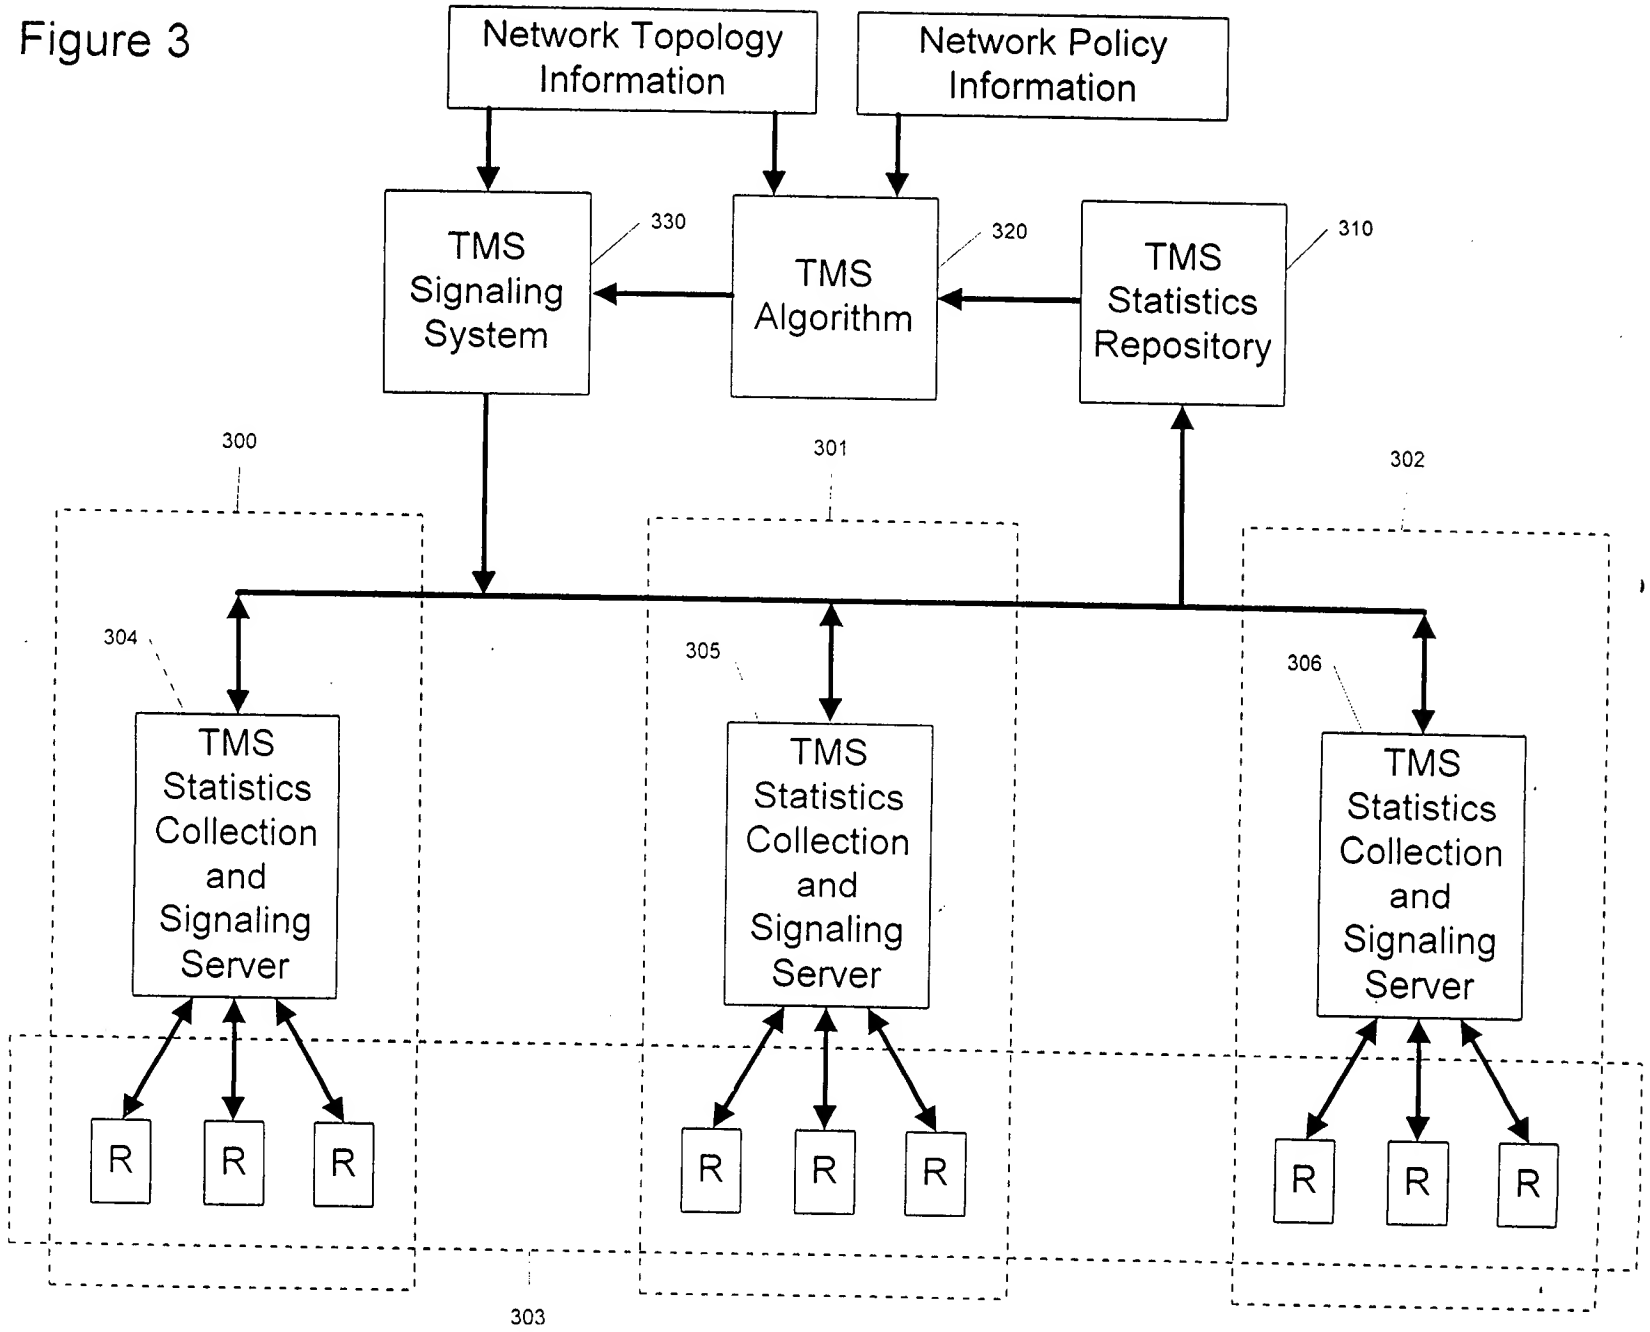

Figure 4

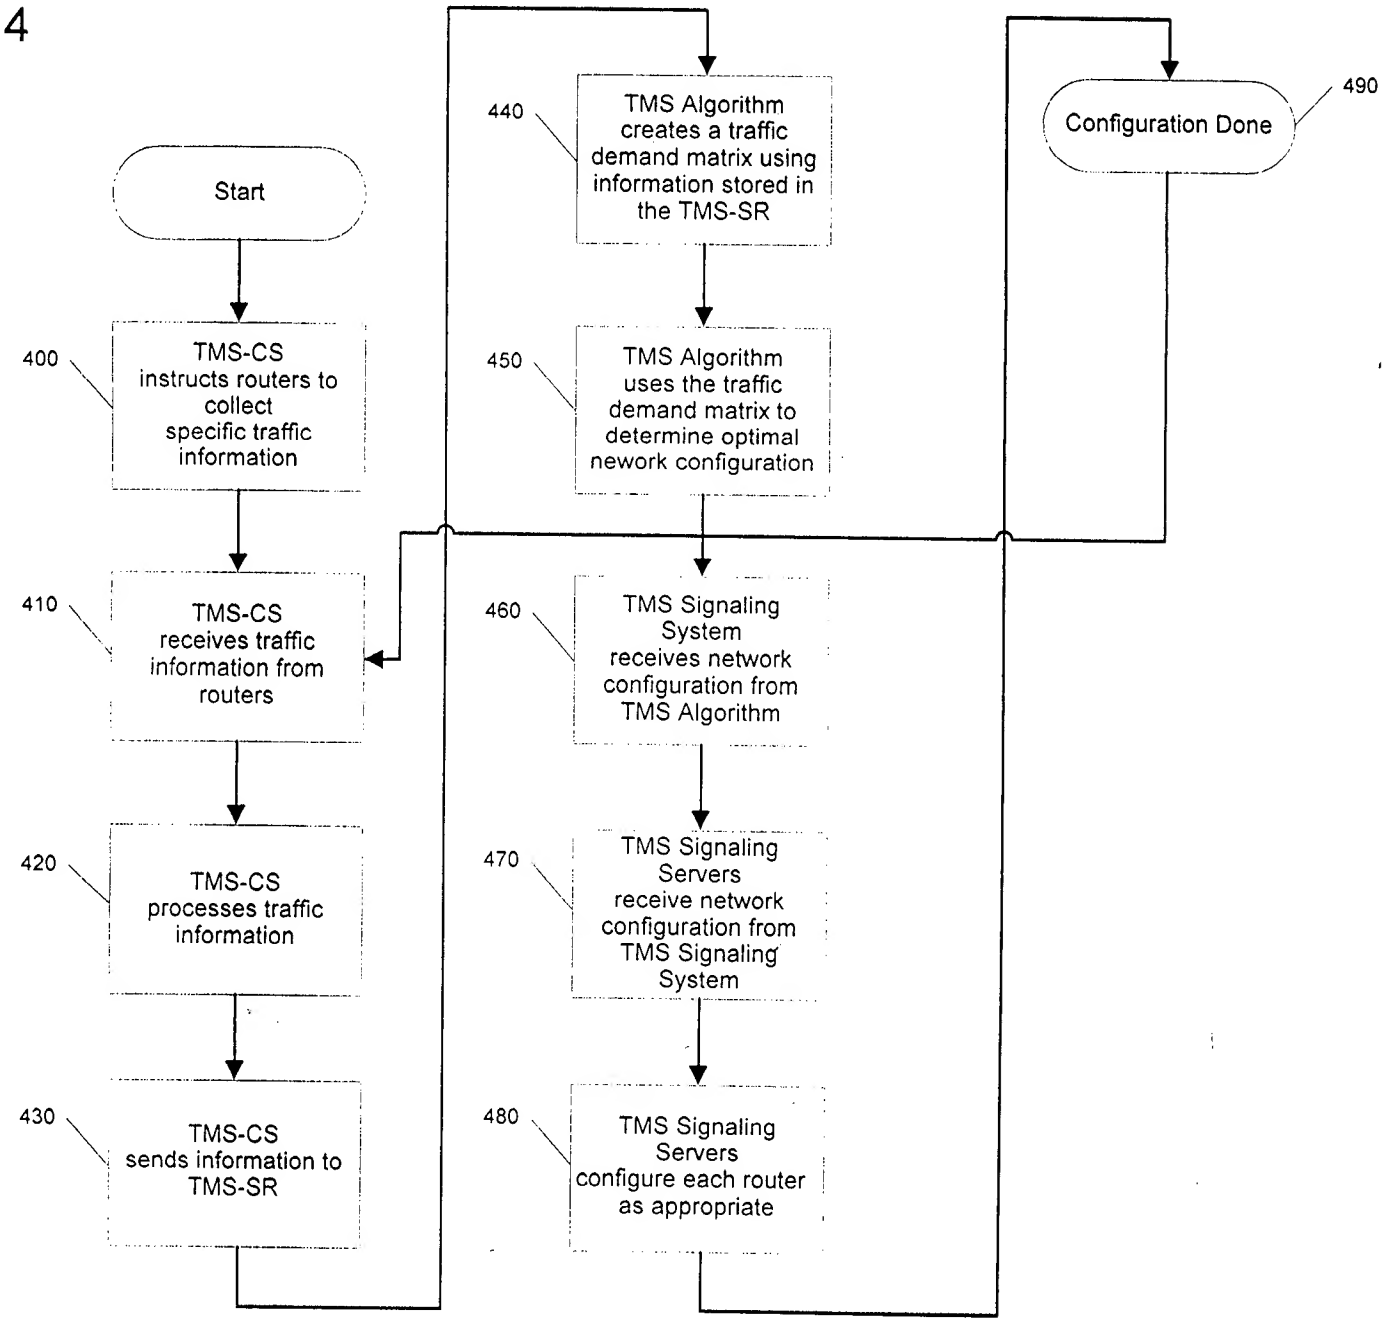
Start
400
TMS-CS instructs routers to collect specific traffic information
410
TMS-CS receives traffic information from routers
420
TMS-CS processes traffic information
430
TMS-CS sends information to TMS-SR
440
TMS Algorithm creates a traffic demand matrix using information stored in the TMS-SR
450
TMS Algorithm uses the traffic demand matrix to determine optimal nework configuration
460
TMS Signaling System receives network configuration from TMS Algorithm
470
TMS Signaling Servers receive network configuration from TMS Signaling System
480
TMS Signaling Servers configure each router as appropriate
490
Configuration Done

Figure 5

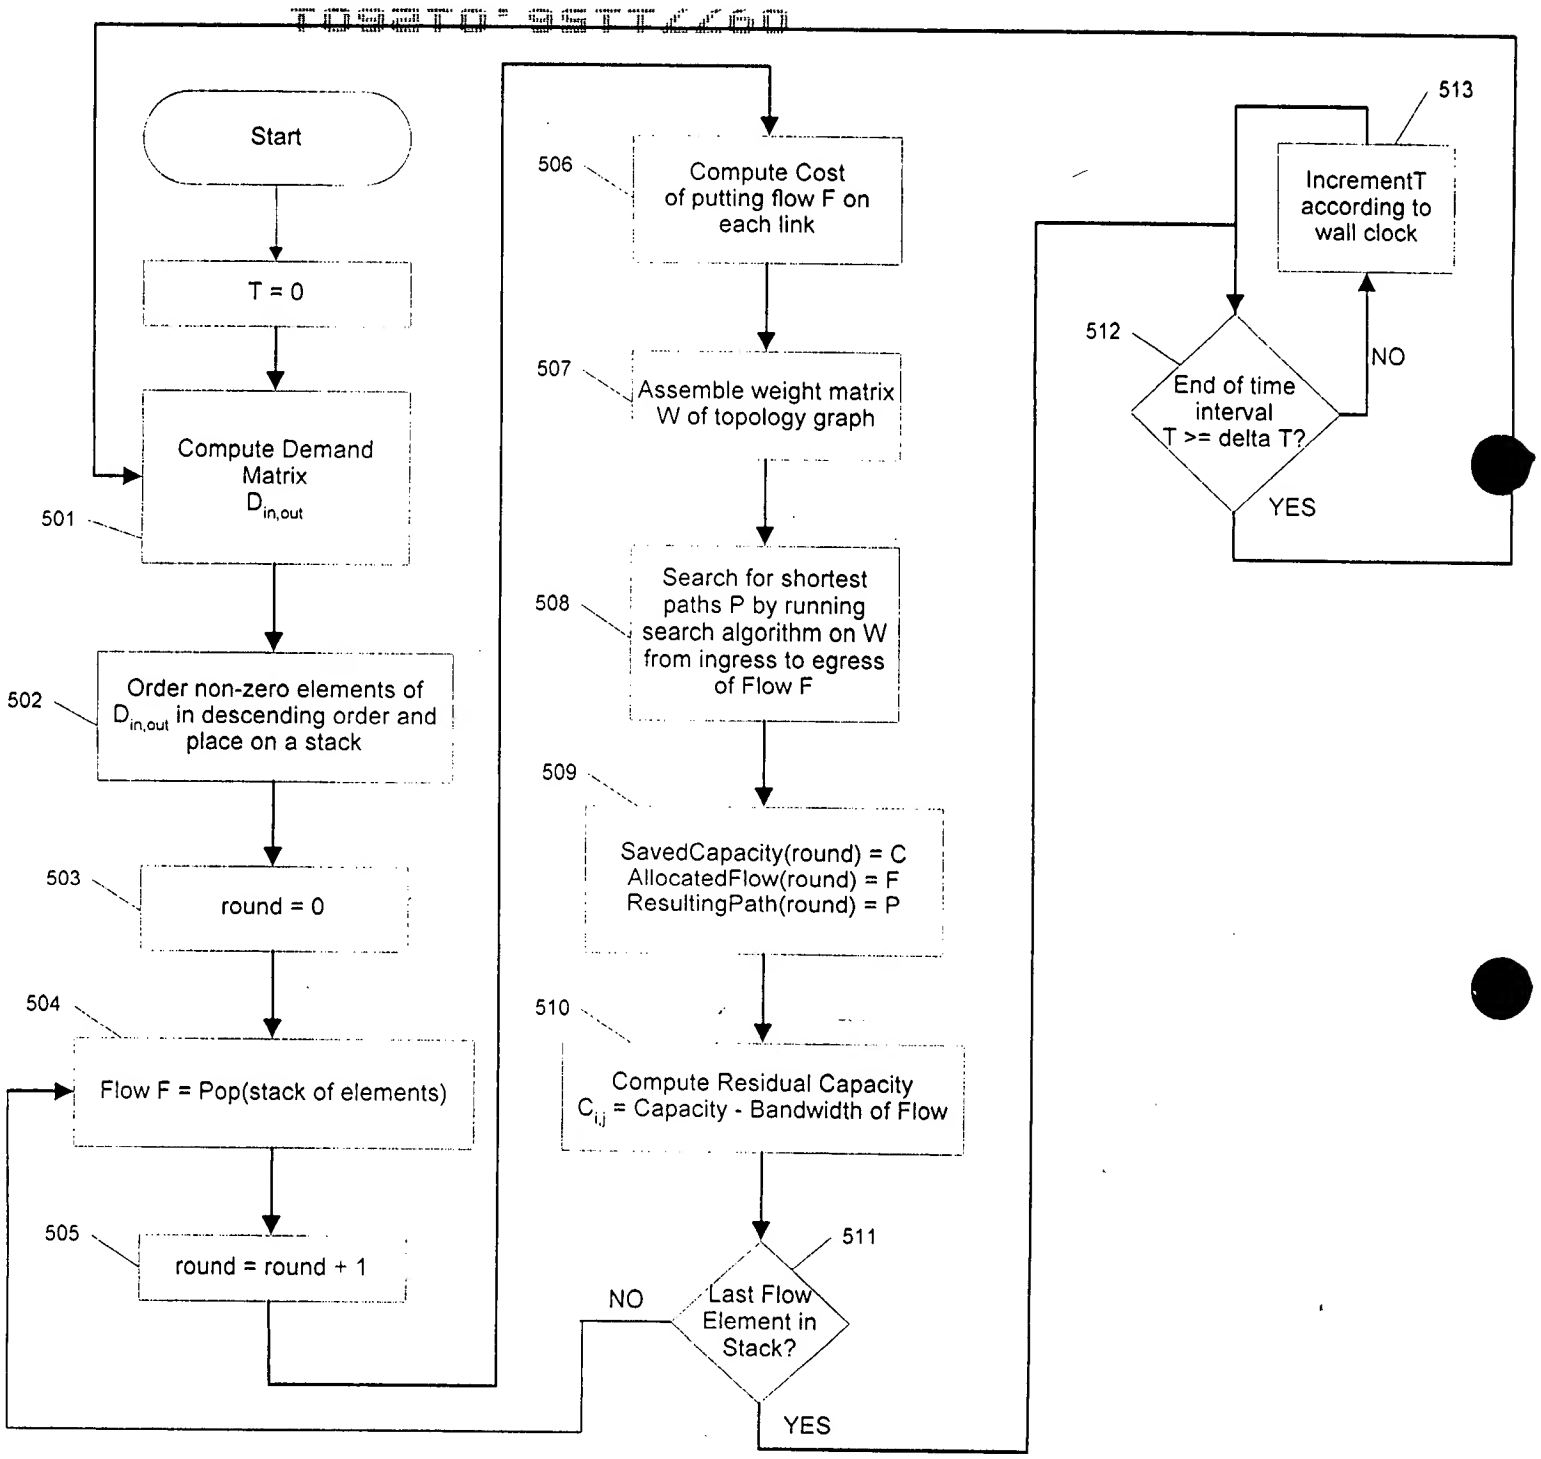
Start
T = 0
Compute Demand Matrix $D_{in,out}$
501
Order non-zero elements of $D_{in,out}$ in descending order and place on a stack
502
round = 0
503
Flow F = Pop(stack of elements)
504
round = round + 1
505
Compute Cost of putting flow F on each link
506
Assemble weight matrix W of topology graph
507
Search for shortest paths P by running search algorithm on W from ingress to egress of Flow F
508
SavedCapacity(round) = C
AllocatedFlow(round) = F
ResultingPath(round) = P
509
Compute Residual Capacity $C_{i,j}$ = Capacity - Bandwidth of Flow
510
Last Flow Element in Stack?
511
NO
YES
End of time interval T >= delta T?
512
NO
YES
IncrementT according to wall clock
513

T09270 95TT2760

Figure 6

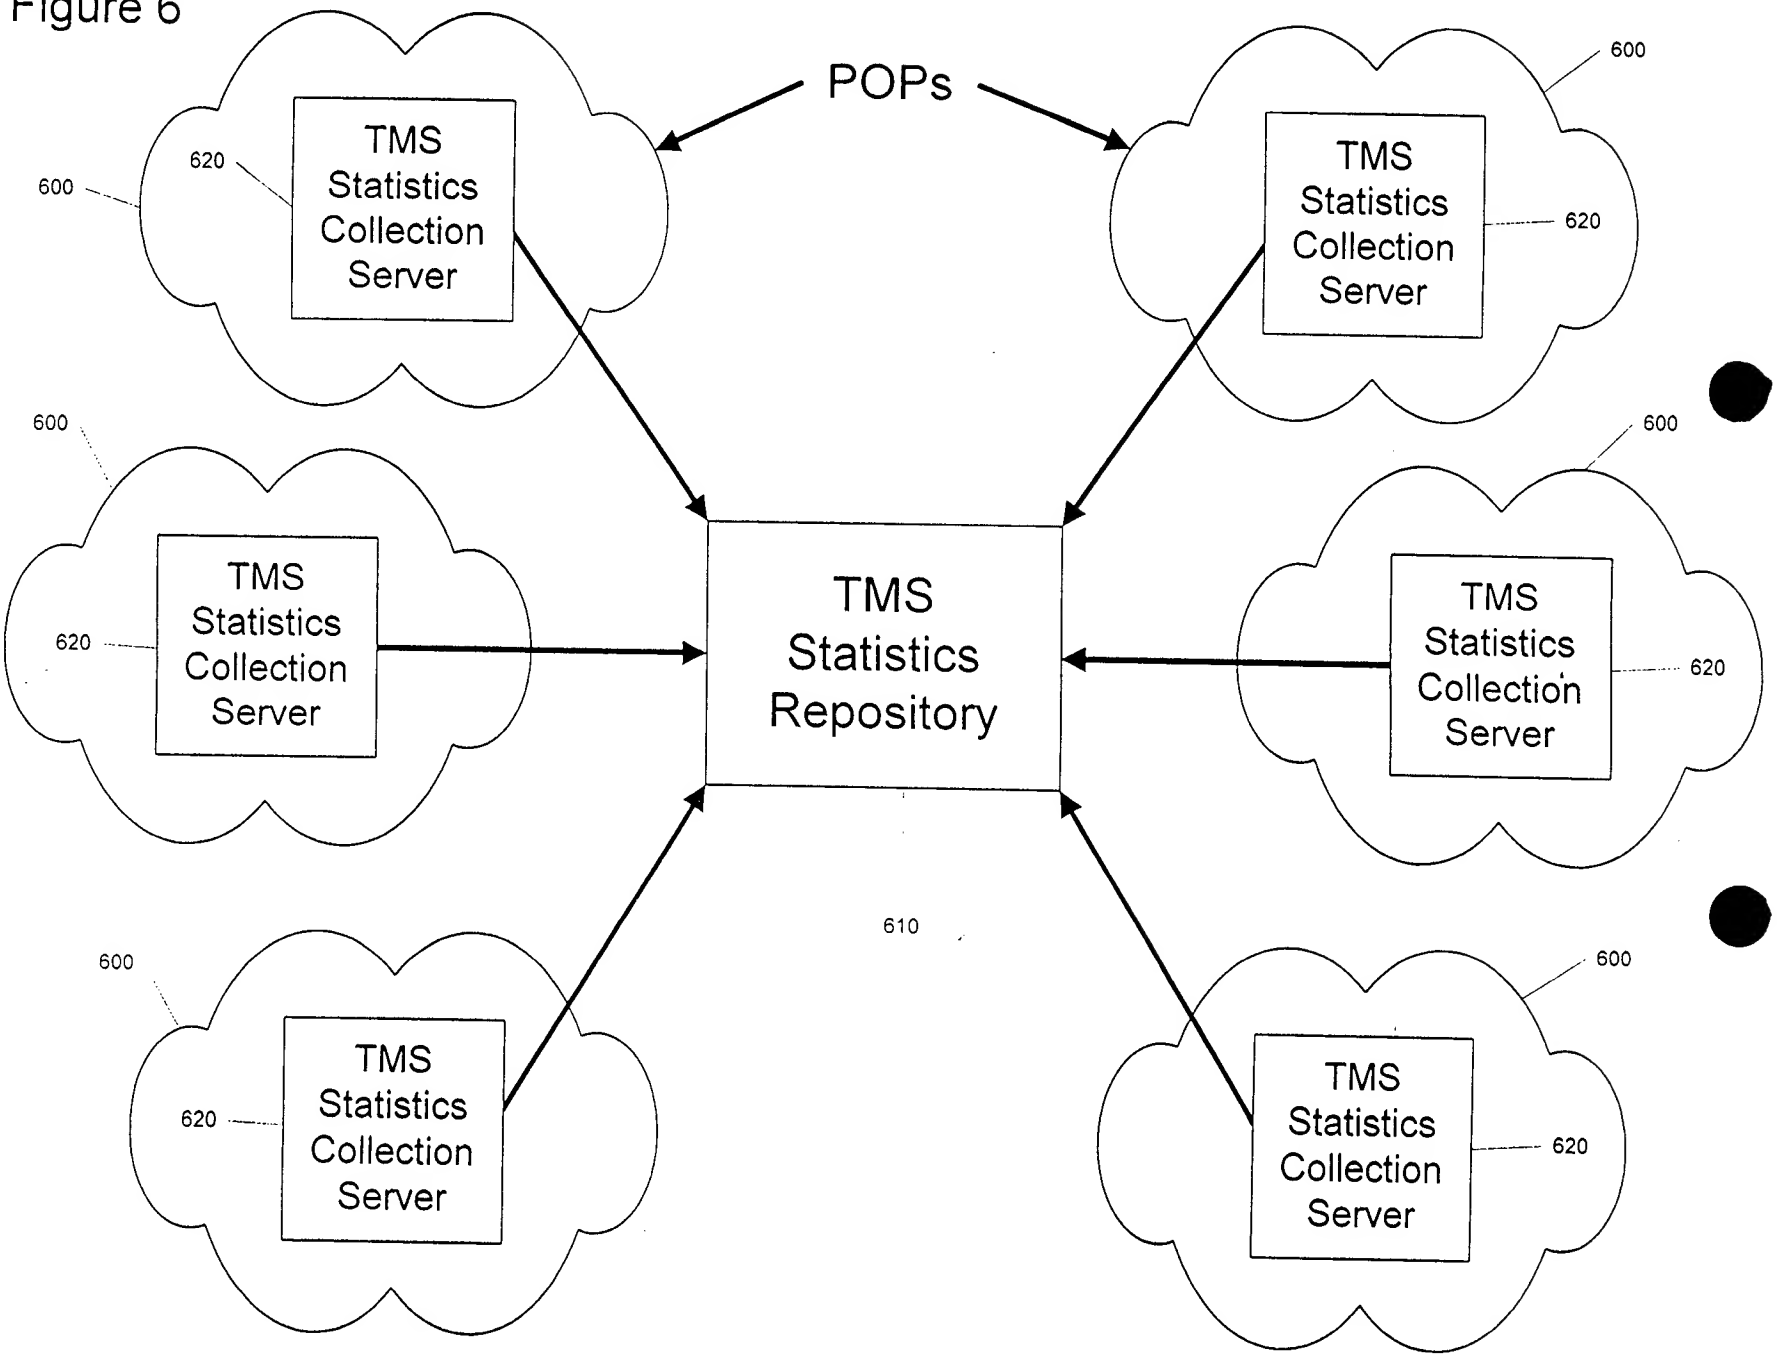

TD9210 95FF2260

Figure 7

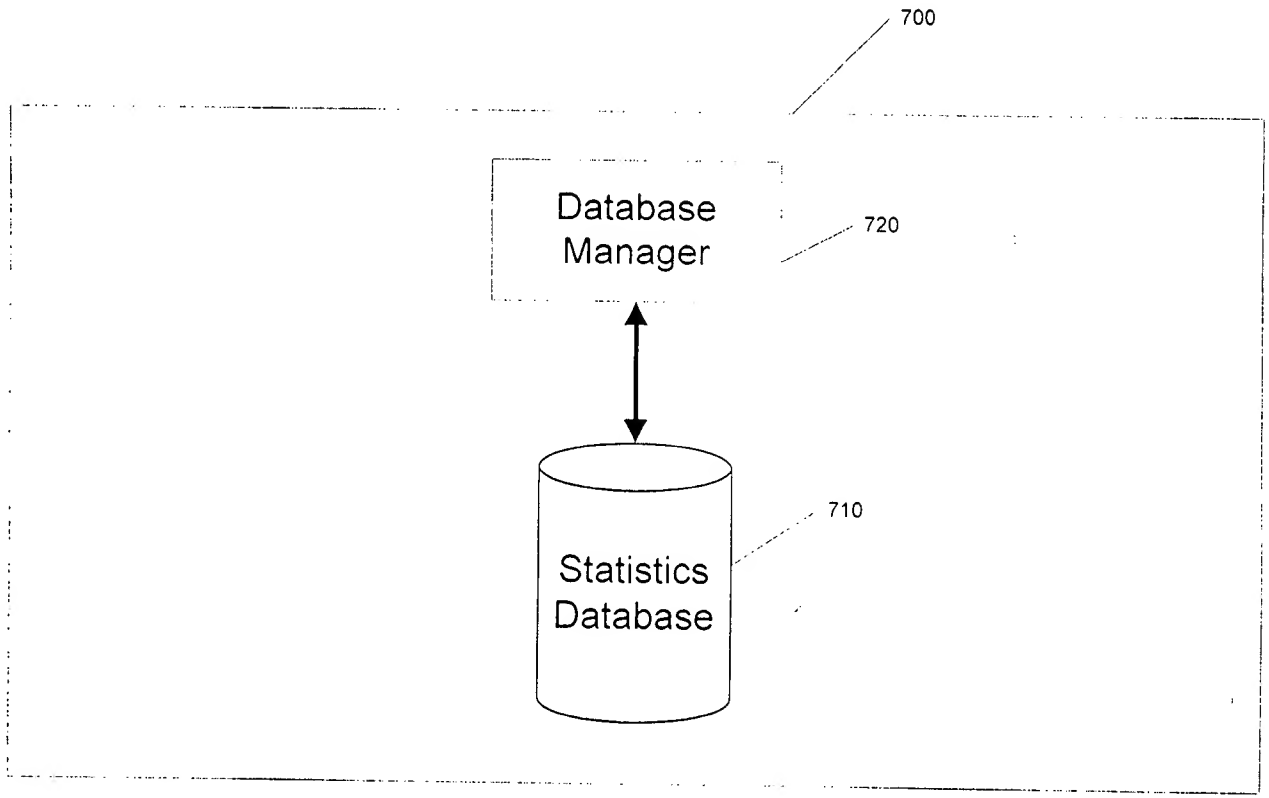

TMS Statistics Repository

T092T0' 95TT2260

Figure 8

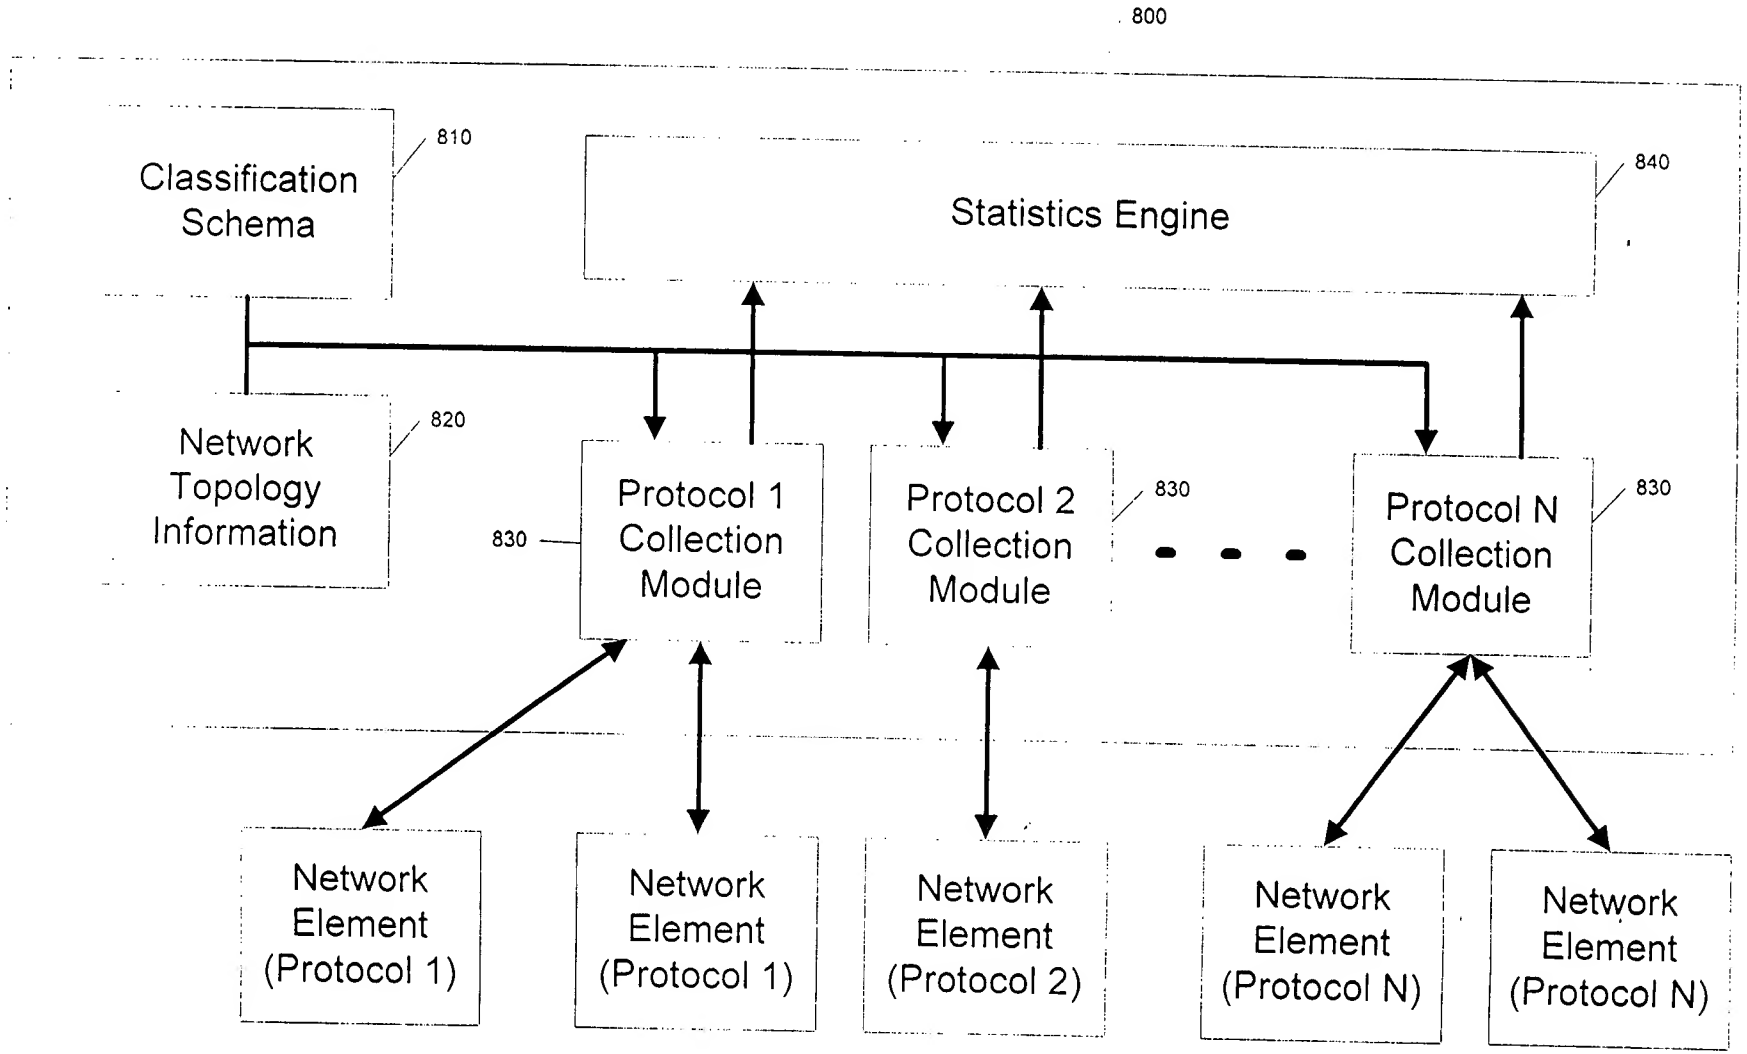

TMS Statistics Collection Server

T09270 95T7260

Figure 9

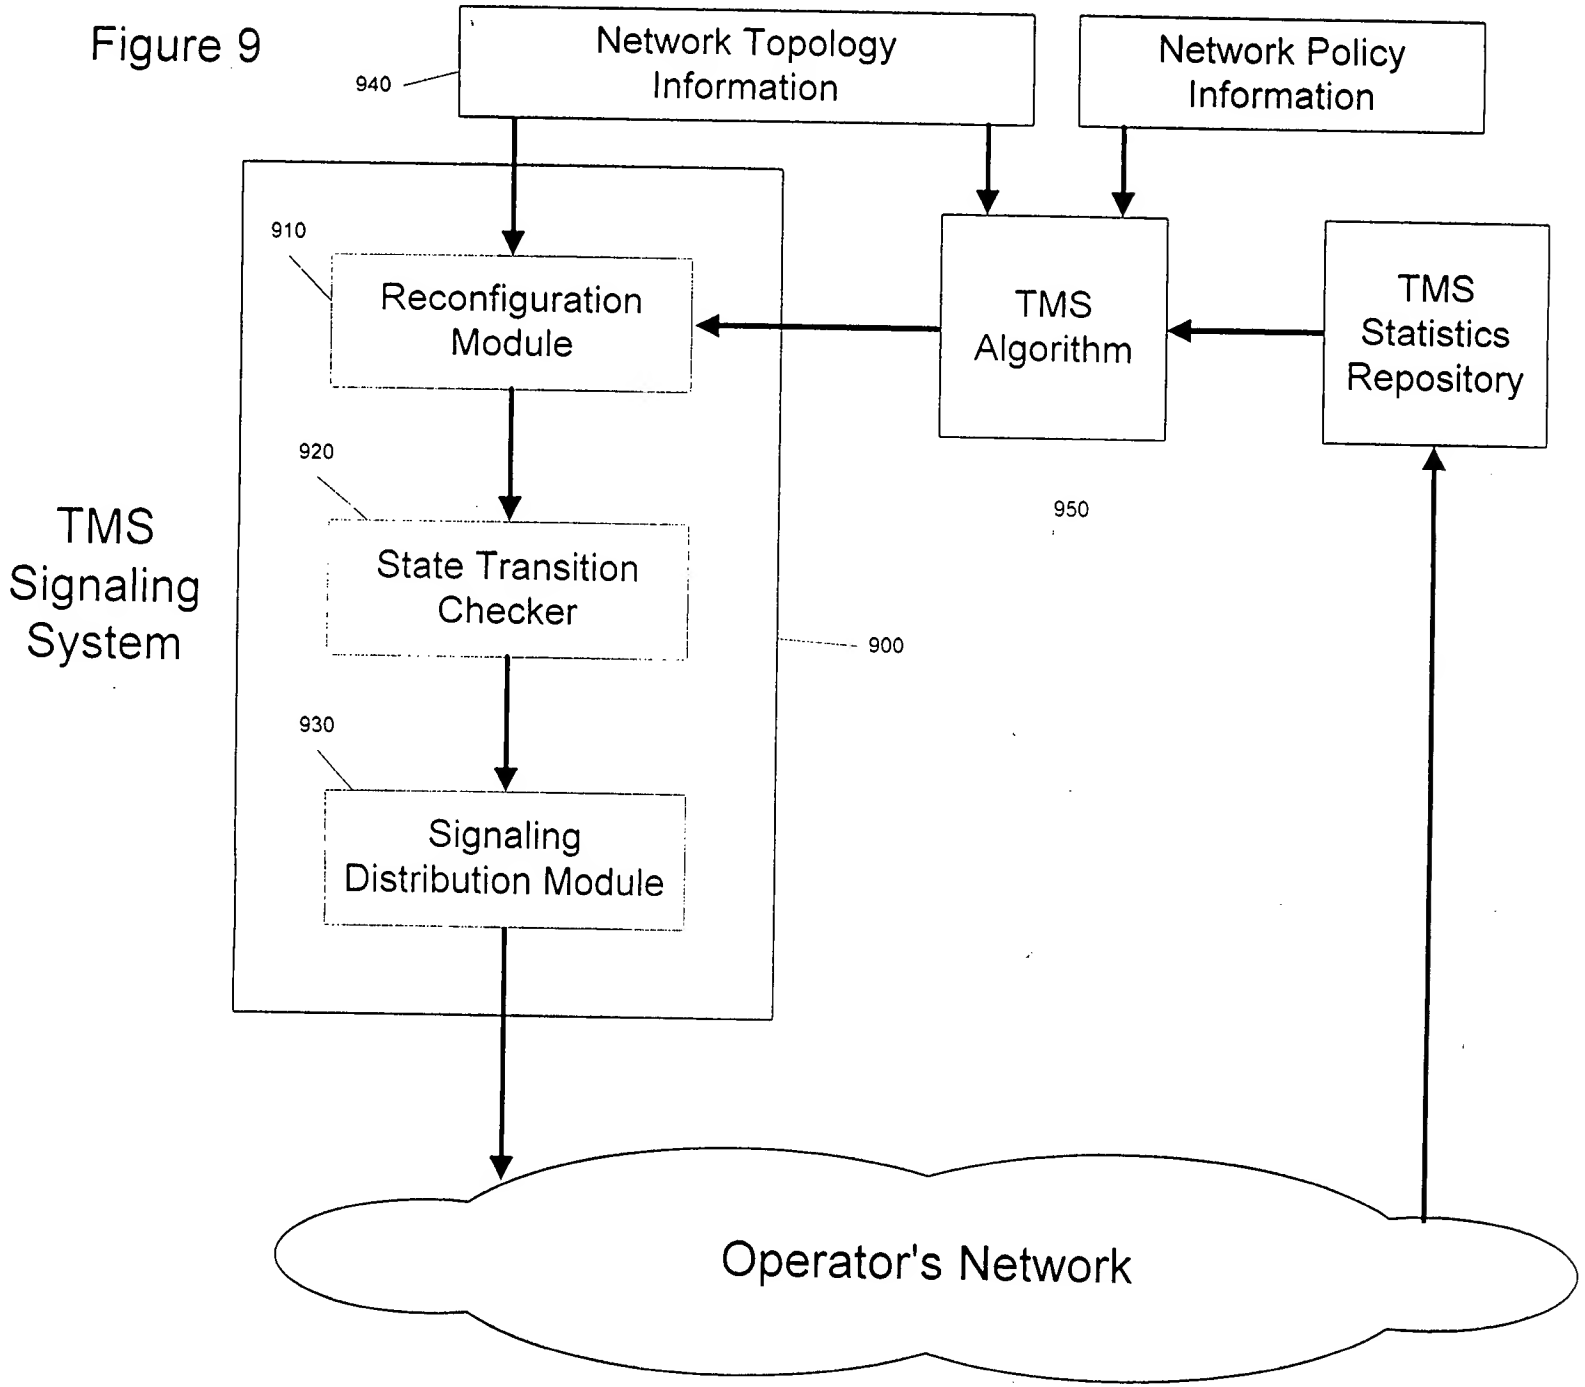

T092T0 95TT260

Figure 10

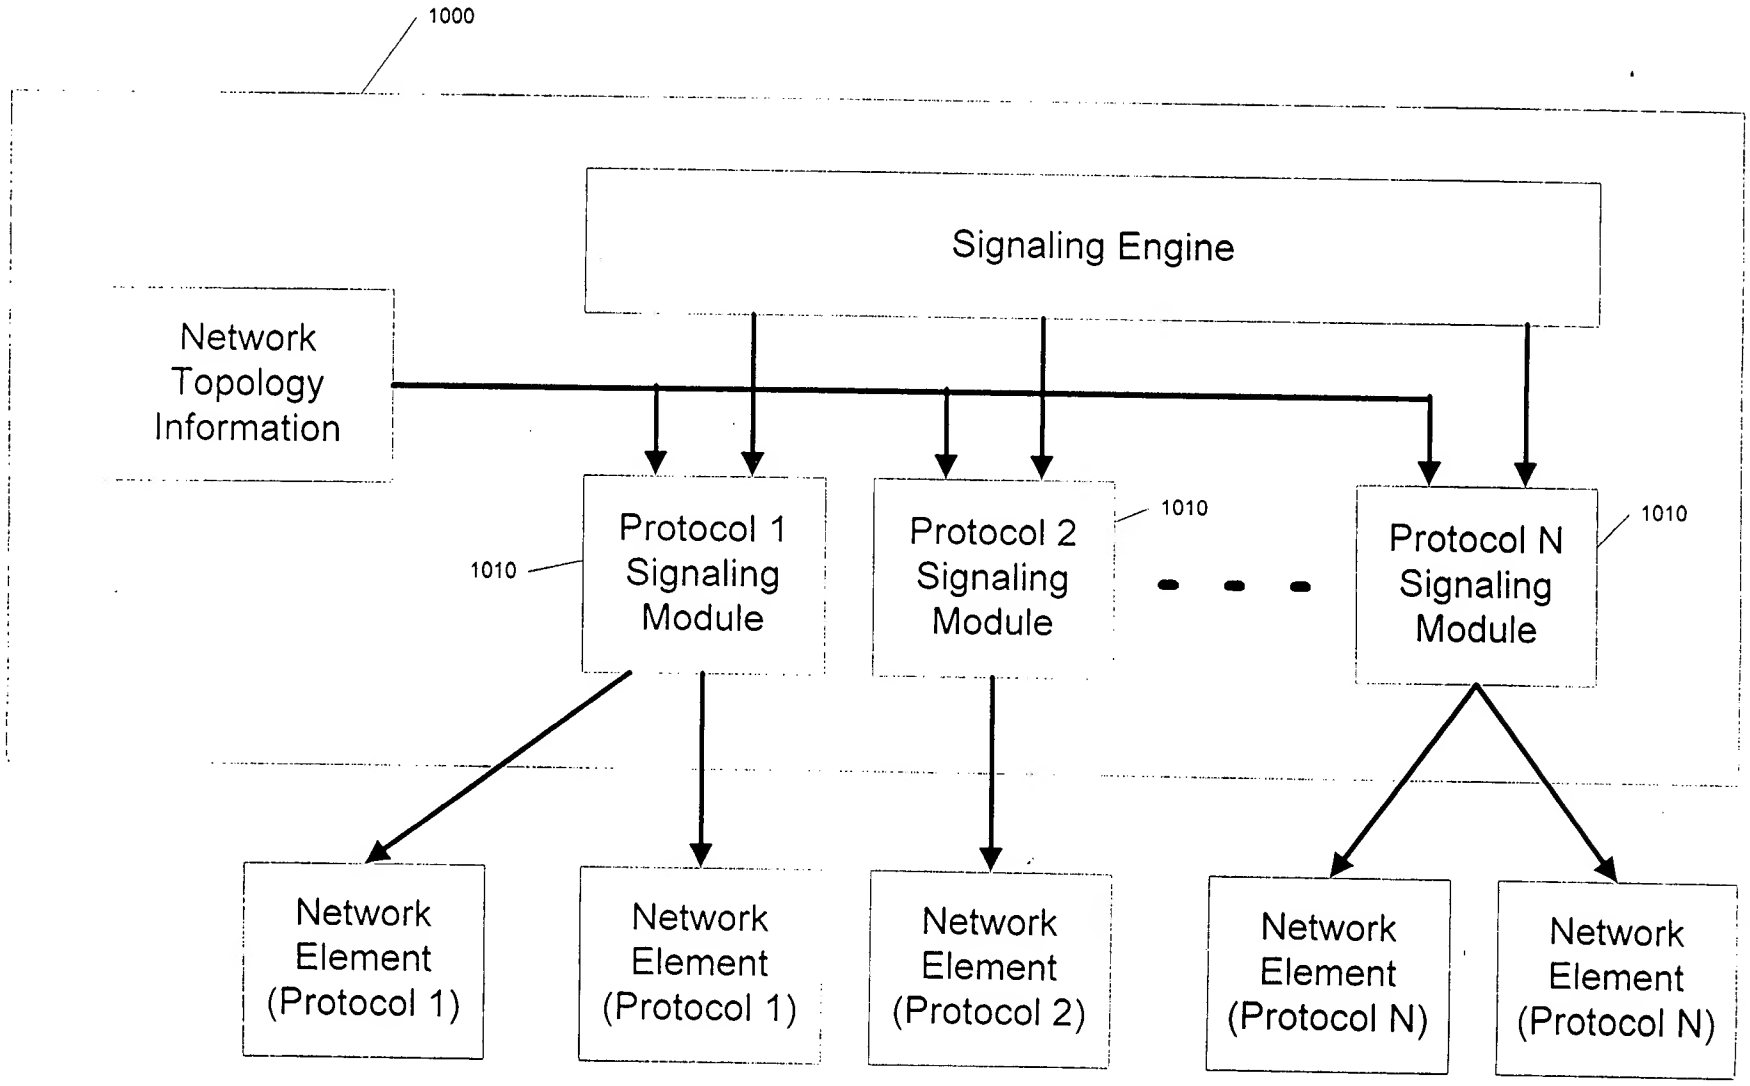

TMS Signaling Server

Figure 11

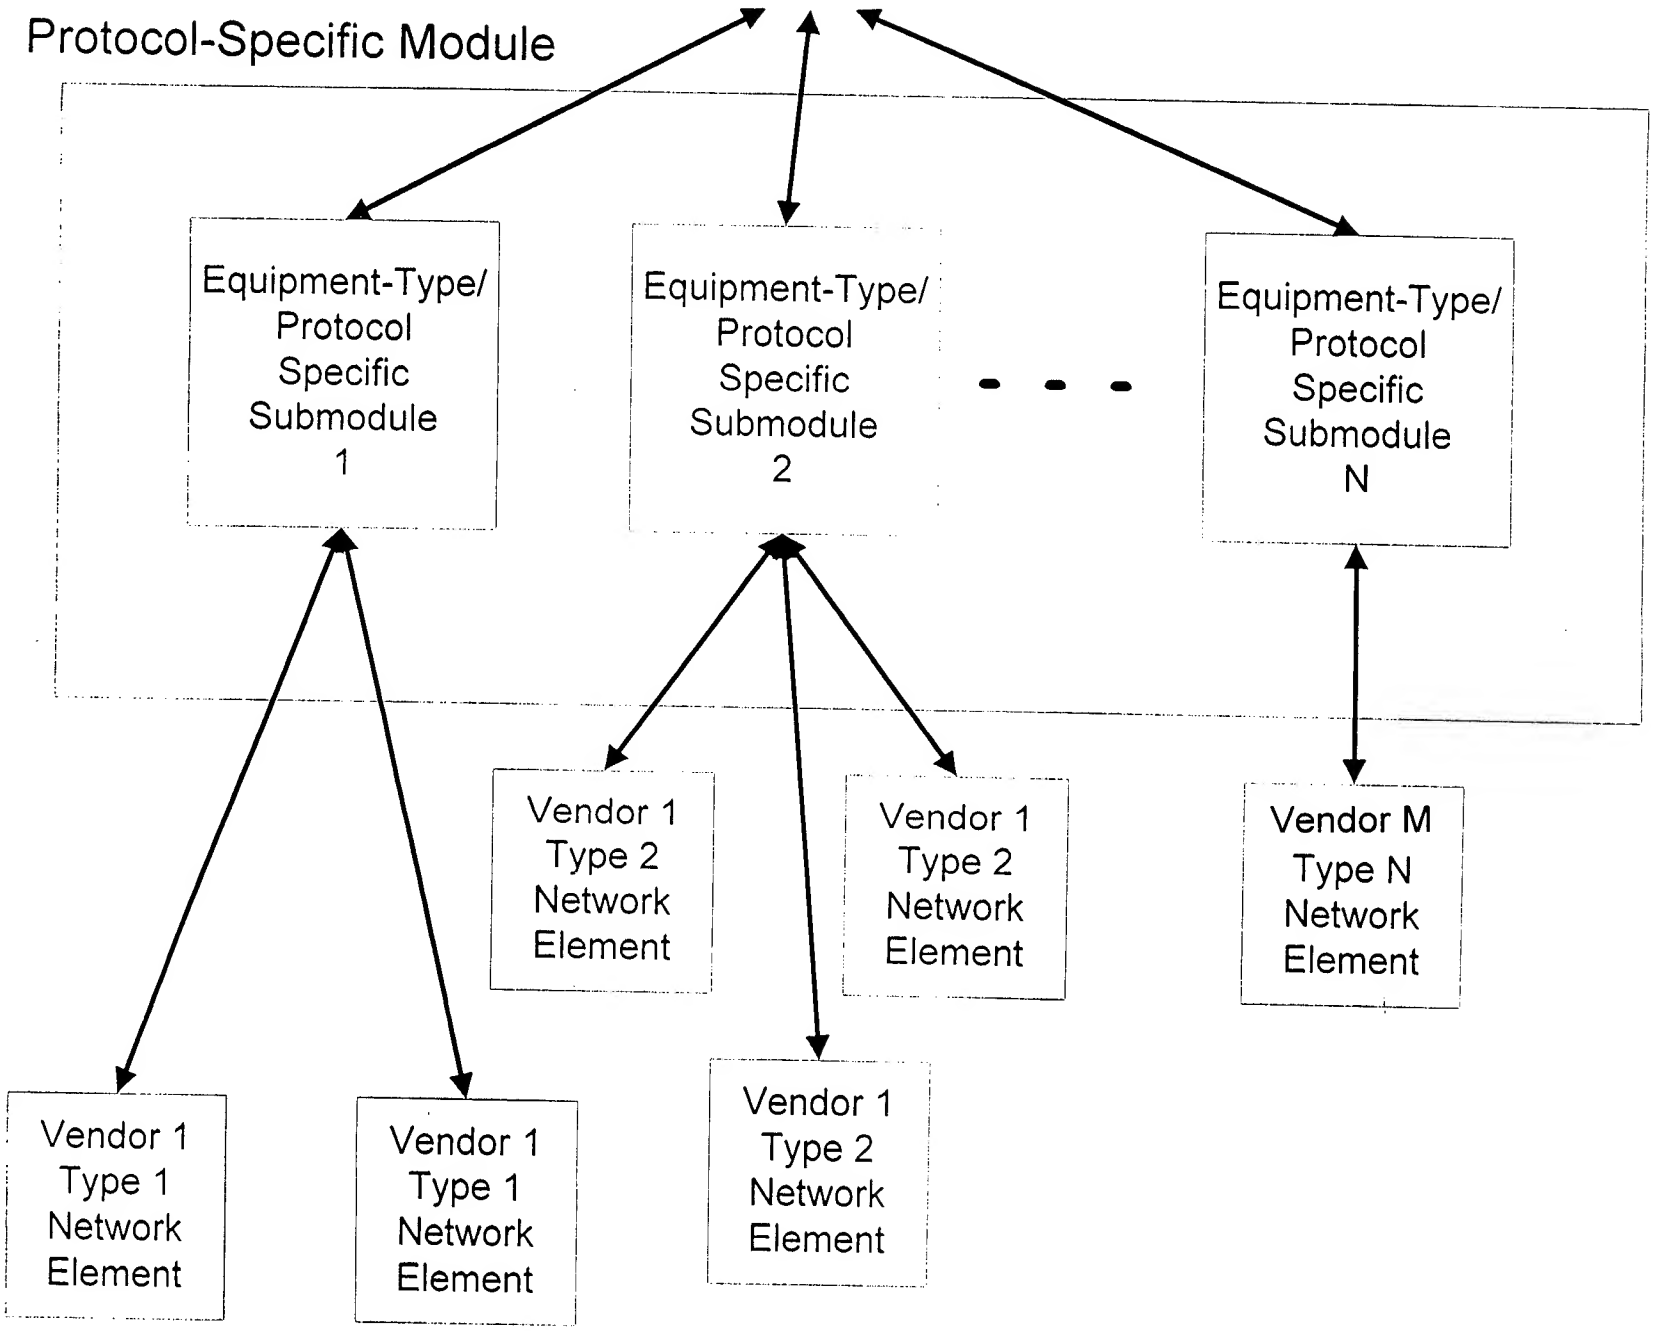
Protocol-Specific Module
Equipment-Type/ Protocol Specific Submodule 1
Equipment-Type/ Protocol Specific Submodule 2
Equipment-Type/ Protocol Specific Submodule N
Vendor 1 Type 1 Network Element
Vendor 1 Type 1 Network Element
Vendor 1 Type 2 Network Element
Vendor 1 Type 2 Network Element
Vendor 1 Type 2 Network Element
Vendor M Type N Network Element